

Product finish	Chrome
Product category	Single Lever
First supplied date	04/05/2011

EAN 13 barcode	5015834045672
Location of DOM trace code:	ABAF5(mm/yy) on rear of handle




Nb. Model shown may not be displayed in the finish as described.

Product features:

- Metal construction throughout
- Custom designed for lower to mid pressures
- Single lever control for effortless single handed control
- Long lever for DDA compliance
- Supplied with copper tail pipes for maximum stability and flow

Additional information / Parts included:

Product dimensions & valve type:

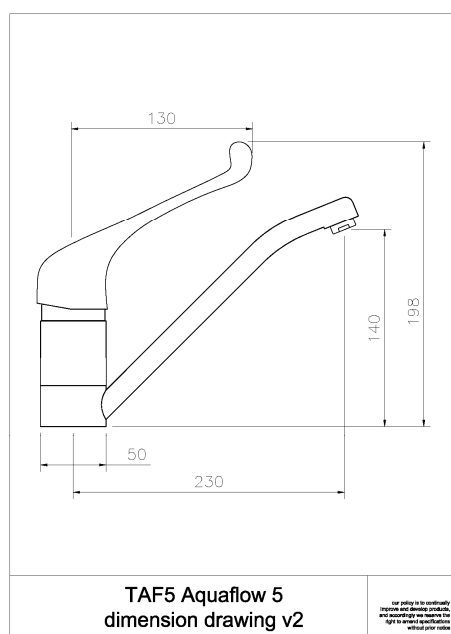

- Overall Height / projection: 198 mm
- Exit reach: 230 mm
- Exit height: 140 mm
- Centre distance(s): N/A mm


- Base diameter(s): 50 mm
- Recommended fixing hole diameter: Ø35 mm
- Max. surface fixing depth: 20 mm

- Control valve type: 40mm Ø Ceramic single lever
- Valve detail:

- DDA compliant design? Yes

Product flow characteristics:

	0.1	0.2	0.3	0.4	0.5	0.75	1	1.5	2	2.5	3	4
Hot water	2.00	4.00	6.00	7.00	8.00	10.00	12.00	15.00	18.00	20.00	22.00	24.00
Cold water	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Mixed water	2.00	4.00	6.00	7.00	8.00	10.00	12.00	15.00	18.00	20.00	22.00	24.00
Filtrated water												
Sprayed water												
Other (see note 1)												
Other (see note 2)												

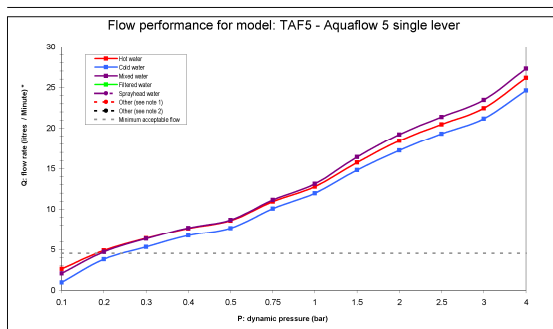

note 1:
note 2:

- Min / Max water pressure: 0.20 / 5.50 bar (LP)

- Recommended / Maximum water temperature: 46°C / 70°C

- Part G:
Unrestricted mixed flow rate, 3 bar (litres / min): 23.44

*Flow results are produced under test conditions and represent the non flow regulated dynamic output of the product model.

LP (lower pressure) less than 0.5 bar
MP (medium pressure) 0.5 bar to 1 bar
HP1 (high pressure) 1 bar to 2 bar
HP2 (very high pressure) 2 bar or more

Minimum flow rate (1 GPM) based on mixed flow.

Flow regulator included? N/A

Inlet pipes:

- **Tail pipe inlet / outlet size:** M12x1 / 15mm outside diameter
- **Inlet pipe type / length:** Copper rigid tube / 245 mm

Spout detail & Flow characteristics:

- | | |
|---|--|
| <ul style="list-style-type: none"> • Spout diameter: 28x14 mm • Spout aerator size: M24x1 M • Spout rotation range: 360° • Aerator type: Flow straightener • Aerator colouring: White plastic • Spout connection: Upper body unscrews | <ul style="list-style-type: none"> • Product flow characteristics: Single flow • Non return valve (NRV) supplied: No, None supplied • NRV required to be installed for byelaw compliance:
Yes, on both hot & cold supplies |
|---|--|

Product markings and indicators:

- **Branding position:** None
- **Hot / Cold indication:** Red & Blue Split Plastic Indices

Packaged properties:

Box length: 360 mm	Box depth: 60 mm
Box width: 140 mm	Units per outer: 10
Box has 'pressure warning sticker' ?	No
Packaging branding:	White unprinted

Tap only weight: 0.90 kg

Boxed weight: 1.21 kg

Total card weight: 96 grams

Total plastics weight: 15 grams

- **Approval certificate number:** WRAS 0812338
- **Expiry date:**

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 2 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 years

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives